


Cartridge Capsule Microphone Manual




Appearance




- 1 Mesh Cover
- 2 Threaded Mounting Port
- 3 Mounting Thread

Parameter

Frequency Respond

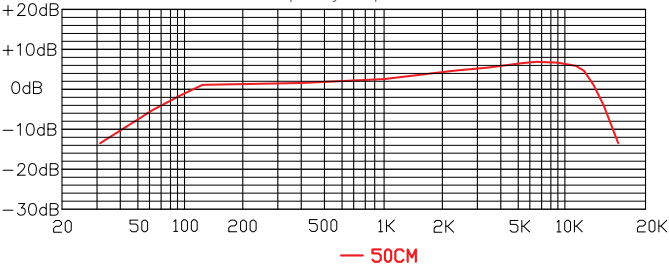

Pattern




Item	Parameter
MIC Type	Dynamic
Frequency Response	50HZ-15KHZ (-6dB at 1KHZ)
Directional Pattern	Cardioid
Sensitivity	-56dB±3dB (OdB=1v/ pa at 1KHZ)
MAX SPL	138dB THD <3% (SPL at 1KHZ)
Output impedance	300Ω±30%
Dimensions/weight	110g / L=86mm, RMAX=52mm

Cartridge Capsule Microphone Manual




Appearance




- 1 Mesh Cover
- 2 Threaded Mounting Port
- 3 Mounting Thread

Parameter

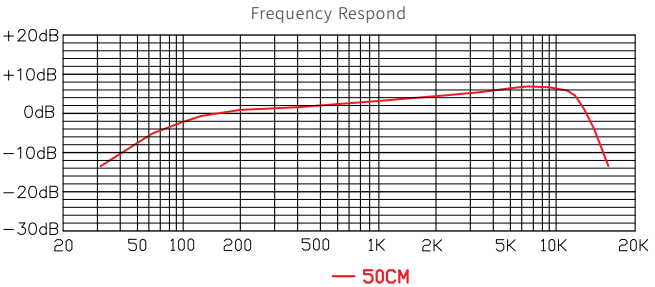

Pattern



Item	Parameter
MIC Type	Dynamic
Frequency Response	50HZ-15KHZ (-6dB at 1KHZ)
Directional Pattern	Super Cardioid
Sensitivity	-56dB±3dB (OdB=1v/ pa at 1KHZ)
MAX SPL	138dB THD <3% (SPL at 1KHZ)
Output impedance	250Ω±30%
Dimensions/weight	110g / L=86mm, RMAX=52mm